

1 way RS-232 to 4ways RS-232 Hub Isolation Converter

Model:MWE232-H4

◆ Brief introduction


The MWE232-H4 convert a 1 way RS-232 signal to 4ways RS-232 signal in the high rate with optic-isolation.

◆ Main Function


- Port-powered, no need RTS,DTR support power;
- Particular protecting circuit for the serial port, hot-Swappable;
- Industry level design,excellent import element chosen,all surface adhibit technics.

◆ Capability parameter

Power Supply	External power of DC5~30V
Working current	<20mA
Baud rate	300~115.2Kbps
Isolation protection	15Kv static protecting and 600W/ms lightning protecting
Weight	128g (with the terminal block)
Dimension	126mm×72mm×34mm
Working temperature	-40℃~85℃

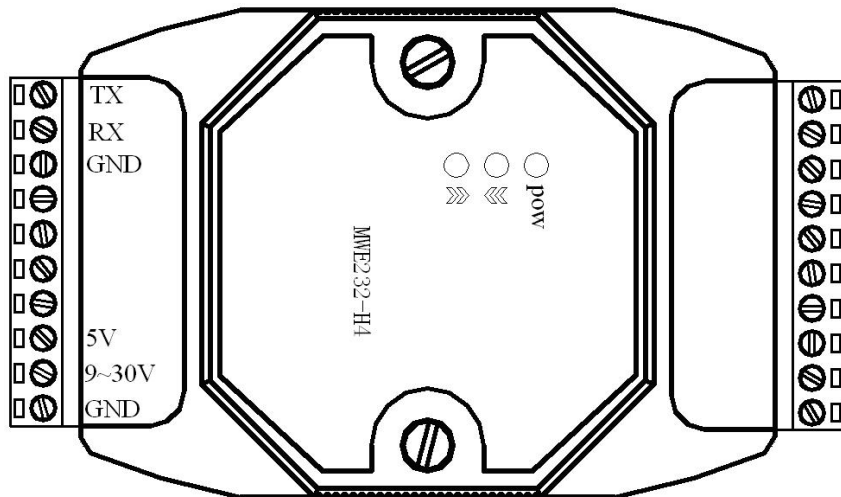

◆ Application

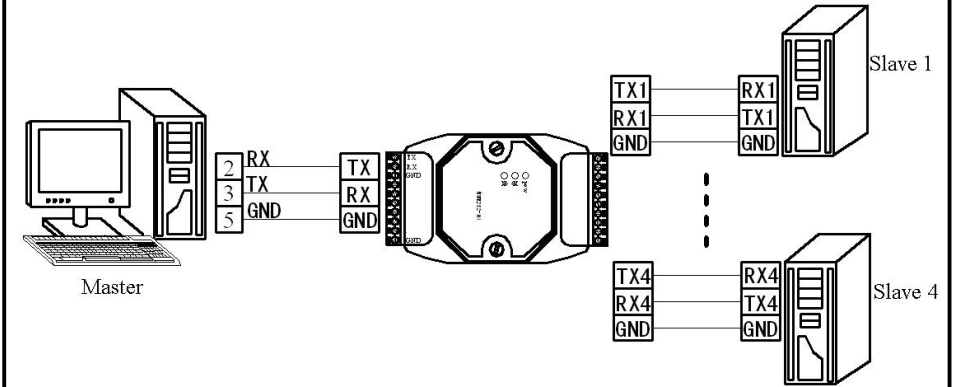

◆ Installation

Serial port

On the product both sides have ten industrial serial ports.Master RS232 port connect with 1,2,3 PIN.PIN 1 is TX(signal sent to external),PIN 2 is RX(signal receive from external),PIN 3 is GND.

Product side is 4 ways RS232 port,both sides are 4 ways RS232 port. Each way isolation with master port.When master port sent signal,each way could receive signal.When some ways sent signal,only master port could receive signal.It non-interference each other way's serial ports.

◆ Quality promises

- 1、 We can exchange the product in 1 years for the quality problem.
- 2、 We guarantee to keep the product in good repair for 5 years.