

MIR652S

Dual Ethernet Port Wall Mount 4G Industrial Router



- Support 2x100M LAN ports, 1x4G antenna interface, and 1xNano SIM card slot
- Support 4G cellular wireless network, enabling wired terminal devices to connect to the internet
- Support SYN-flood defense, port mapping, IP/MAC/DNS address filtering, custom rules with iptables, DMZ isolation zone, UPnP, IP/MAC speed limiting, QoS to limit upload/download speeds, and other firewall functions
- Support Peanut Shell intranet penetration, dynamic DNS, VPN, SNMP, LLDP, cloud services, and more
- Support industrial-grade DC power input of DC9~24V.
- High-strength metal enclosure with fanless heat dissipation design
- Operate in -40°C to +75°C



Product Description

The MIR652S is a wall-mount 4G industrial router designed and developed specifically for industrial communication networks. It supports 4G cellular wireless networks and features 2x100Mbps LAN ports, 1 x 4G antenna interface, and 1xDC9~24V power input.

This product supports a wide range of network management functions via WEB configuration, including DHCP server, 4G network settings, APN configuration, IP/MAC binding, static routing, link check, network diagnostics, firewall settings, Peanut Shell intranet penetration, VPN, SNMP, LLDP, cloud services, NTP, and more. The system provides user management with different levels of permissions, supports local/remote log management, scheduled reboot, configuration backup and restore, firmware upgrades, and factory reset. It also supports one-click reset or factory reset via buttons.

The hardware adopts high-standard industrial protection design, with carefully selected industrial-grade components and a high-strength metal enclosure, ensuring durability and robustness. It features low power consumption, wide temperature design, and fanless heat dissipation, supporting an operating temperature range of -40°C to +75°C. It has undergone rigorous safety and EMC testing to meet the demanding requirements of industrial environment applications. This product can be widely used in industrial automation, integrated energy, smart cities, intelligent transportation, smart mines, smart factories, and other fields.



Features and Benefits

- LAN port supports DHCP server, facilitating centralized dynamic management and configuration of user IP addresses
- 4G network supports three-network compatibility and dedicated APN
- Support static routing, enabling manual addition of routing rules for route selection and packet forwarding
- Support link check, periodically checking the status of the 4G network link and performing link recovery
- Support IPv4/IPv6 Ping, IPv4/IPv6 Traceroute, Nslookup, and packet capture for network diagnostics and troubleshooting
- Support Peanut Shell intranet penetration, enabling remote login and device management via Peanut Shell dynamic domain name
- Support NTP client and server functions for clock synchronization or providing clock sources
- Log record various levels of kernel, application, and network information, supporting local download, scheduled saving, and remote monitoring
- Support dynamic DNS function, enabling remote login and device management via specified domain name
- Support VPN client and server for building dedicated networks, with client supporting PPTP, L2TP, GRE, GRE-TAP, OpenVPN tunnel protocols, and server supporting PPTP, L2TP, and IPSec protocols
- Support SNMPv1/v2c, enabling information query, modification, and troubleshooting through MIB for centralized management
- Support LLDP, obtaining LLDP neighbor device information for link status monitoring, facilitating topology management and fault localization
- Support Maiwe cloud platform management, enabling remote management of devices and monitoring of on-site network status



Specification

Software



Specification

Network Management Function	<p>Support traffic statistics, operational status, network status, local address, and other status information</p> <p>Support DHCP server and IP/MAC binding</p> <p>Support 4G network, APN configuration, and link check</p> <p>Support static routing</p> <p>Support Peanut Shell intranet penetration, dynamic DNS, SNMP, LLDP, and cloud services</p> <p>Support PPTP/L2TP/GRE/GRETAP/TUN/TAP protocol VPN clients</p> <p>Support PPTP/L2TP/IPSec protocol VPN servers</p>
Firewalls	<p>Support SYN-flood defense, IP dynamic spoofing, MSS clamping, inbound/outbound data control</p> <p>Support TCP/UDP port mapping</p> <p>Support IP/MAC/domain filtering, iptables, DMZ, UPnP, IP/MAC/QoS speed limiting</p>
System Management	<p>Support IPv4/IPv6 Ping, IPv4/IPv6 Traceroute, Nslookup, packet capture</p> <p>Support time zone configuration, NTP client/server, management port settings, Crontab, remote/local logging</p> <p>Support user permission management, SSH access</p> <p>Support online reboot, scheduled reboot, configuration backup/restore, firmware flashing, factory reset</p>
4G Cellular Network	
Network Format	LTE-FDD、LTE-TDD
Working Frequency	<p>LTE-FDD: B1/B3/B5/B8</p> <p>LTE-TDD: B34/B38/B39/B40/B41(194M)</p>
Theoretical Transfer Rate	<p>LTE-FDD: DL 75Mbps/ UL 50Mbps</p> <p>LTE-TDD: DL 65Mbps/ UL 30Mbps</p>
Interface	
100M LAN	2x10/100Base-T(X) auto-sensing Gigabit RJ45 LAN Ports, support full/half duplex, auto MDI/MDI-X
Antenna Connector	1xSMA-K (female, external thread, inner hole) antenna interface, used to connect to the 4G cellular antenna
SIM Card Slot	1xNano SIM card slot
Status LED	Power indicator, Operation indicator, Network indicator, 4G indicator, Signal indicator, Copper port indicator
Power Supply	
Power Input	DC9~24V
Power Consumption(Full Load)	<3W@DC12V




Specification

Connection	Φ2.5mm DC Circular Connector
Physical Characteristics	
Dimensions	96×90×26 mm (mounting brackets)
Installations	Wall mount
IP Code	0.25kg (Excluding antenna)
Working Environment	
Operating Temp	-40℃~+75℃
Storage Temp	-40℃~+85℃
Relative Humidity	5%~95% (non-condensing)
Industry Standard	
EMC	IEC 61000-4-2 (ESD): Level 4 (Contact discharge ±8kV, Air discharge ±15kV) IEC 61000-4-5 (Surge): Level 3 (Power supply: Common mode ±2kV, Differential mode ±1kV; Ethernet port: Common mode ±6kV, Differential mode ±2kV) IEC 61000-4-4 (EFT): Level 4 (Power supply: ±4kV; Ethernet port: ±2kV)
Certification	CE, FCC, RoHS



Dimensions

Unit: mm

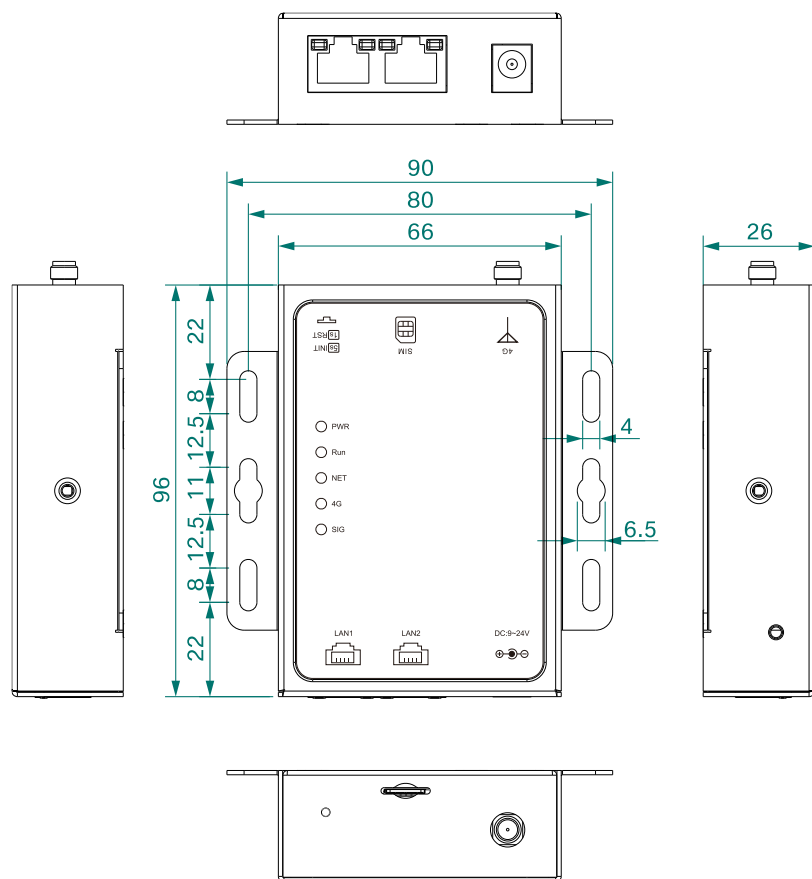



Ordering Information

Standard Model	100M LAN	4G Antenna	Input Voltage
MIR652S	2	1	DC9~24V



Contact Us

Wuhan Maiwe Communication Co., Ltd

Address: No.52 Liufang Avenue, East lake High-tech Development Zone, Wuhan, China.

Tel: 027 8717 0217

Mail: enquiry@maiwe.com

Official site: www.maiwe.com

Copyright © Maiwe Communication All rights reserved.